



tx
digicast

DAB RF Filter

TX-FILTER-DAB600





Features

Band III tunable
Temperature compensated
SMA monitoring connector

Applications

Major networks
Small Scale DAB
DAB installations up to 600W

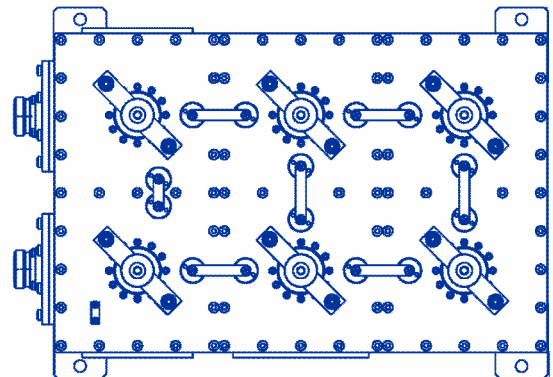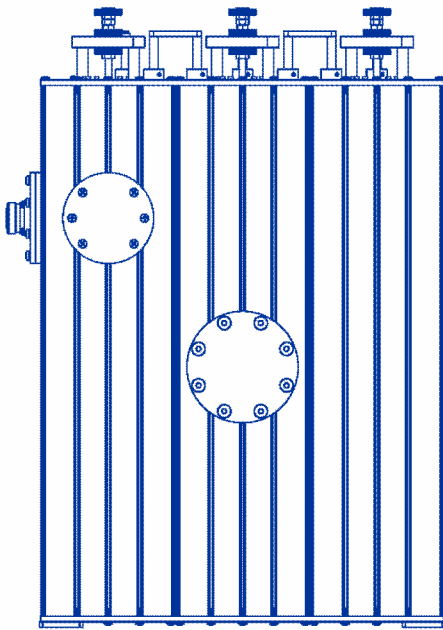

Specifications

Dimensions: 7500 x 2810 x 3750 HxWxD (mm)
Weight: 26kg
Insertion Loss: < 1.05 dB at Fc
< 2.5 dB at Fc ± 0.77 MHz
≥ 15 dB at Fc ± 0.97 MHz
Selectivity: ≥ 45 dB at Fc ± 1.75 MHz
≥ 45 dB at Fc ± 2.2 MHz
≥ 45 dB at Fc ± 3 MHz

Return Loss: ≥ 26dB
Group delay: ≤ 950 ns (typical)
Frequency Range: 174-240 MHz
Maximum Input Power: 600 W
Bandwidth: 1.54 MHz
Operating Temperature: -10 to + 50°C

txdigicast.com

TX Digicast

www.txdigicast.com info@txdigicast.com

Lucoro Limited, Clay Pit Lane, Bar Lane Industrial Estate, Rocliffe, York YO51 9FS

We reserve the right to alter specifications without notice. E&OE. Illustrations are for guidance only and do not form a contract.